

TM-CB M7 33 Ah ANTHRACITE MAIN STATION TM-CM.0703312DA

Click on the selected icon to download the file:



No: 33A23



No: 5251/2024
Valid until:
20.12.2028



No: 33A23



No: 33A23



No: 063-UWB-0591
Valid until:
20.12.2028



No: CBM-01/24



Producer	TM Technologie
Application	central battery
Colour/Colour - RAL	anthracite , RAL7016
Appliance classes	I
Protection degree	IP30
Warranty (body, electronics)	60 months
Net dimensions L x W x H [±2 mm]	600 mm x 229 mm x 1740 mm

POSSIBILITIES

Software included	Visual Base
Maximum number of emergency fittings in the system	240 pcs.
Maximum number of emergency fittings per circuit and channel	20 pcs.
Maximum number of substations and signal distributors	7 pcs.
Maximum distance between control panel and luminaire	300 m
*Maximum distance between control panel and luminaire using the repeater function	1000 m
I/O module using possibility	yes
Allowed topology	parallel connection, star connection
Maximum luminaires power CB 1h	4320 W
Maximum luminaires power CB 2h	2640 W
Maximum luminaires power CB 3h	1830 W
Maximum luminaires power CB 8h	840 W

TELECOMMUNICATION CABLES

Telecommunication cables with appropriate fire classification and circuit integrity in case of fire (if applicable)

Control panel - substation subdistribution signal distributor cable	1 x 2 x 0,8 mm²
Maximum length of communication cable	1000 m
Maximum resistance	75 Ω
Maximum conductor capacitance	140 nF/km

POWER CABLES

Power cables with appropriate fire classification and circuit integrity in case of fire (if applicable)

AC power cable cross section	3 x 2,5 - 6,0 mm²
Type and cross section of luminaires power cable	3 x 0,5 - 4,0 mm²
Communication protocol	TCP IP/MODBUS, RS485, PLC, USB


TM-CB M central battery system

modern design, advanced electronics

Power supply, control and monitoring of circuits and emergency luminaires of evacuation lighting in public utility buildings.

- » central supervision of all circuits and emergency luminaires connected to the system
- » system equipped with batteries that provide the appropriate amount of energy needed for a specific time of operation of emergency luminaires
- » intelligent monitoring systems that provide information on the condition of batteries, luminaires, and possible faults
- » various system configurations, which can be adapted to the individual needs of the building, its size and specific requirements for emergency lighting.

TOPOLOGY

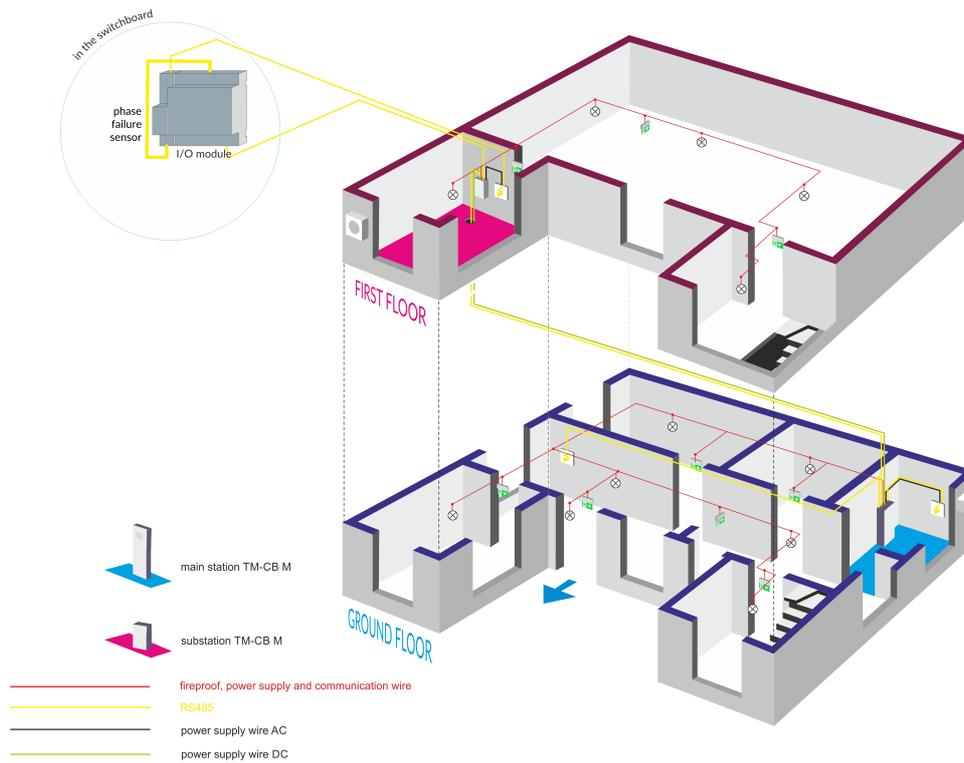

TM-CB M SUB PR12 ANTHRACITE TM-CM.1200012DA



Sub-distribution TM-CB M PR12

The sub-distribution board enables the system to be extended by another 12 circuits.

- » number of circuits: 12
- » maximum number of luminaires on one circle: 20
- » colour: anthracite

TM-CB M SUB PR20 ANTHRACITE TM-CM.2000020DA



Sub-distribution TM-CB M PR20

The sub-distribution board enables the system to be extended by another 20 circuits.

- » number of circuits: 20
- » maximum number of luminaires on one circle: 20
- » colour: anthracite

TM-PROG RFID CB|DATA2|DALI TM-MN.RFID002



TM-PROG RFID is a programming device used to read and addresses of lighting fittings that are compliant with TM-CB | DATA2 | DATA2 RADIO| DATA3 | DATA3 RADIO | DALI | DALI-2 systems.

- » Programming is executed in a wireless mode that provides for operation without connecting lighting fittings to a power supply.
- » The programming device has a built-in battery that offers long operating time, and the current consumption is shown on a display.
- » The programming device has an ergonomic casing that protects the device against mechanical damage and prevents accidental slipping from the hand.

TM-CB M CIRCUIT MANAGER 2x3A TM-MN.CB.KOB003



Circuit manager MCL-C

A device that controls the operation of output circuits. Depending on the operating mode, it switches on the appropriate type of voltage (AC or DC), controls the monitored CBM luminaires, performs DC current measurements and activates the modified mode.

- » number of electrical circuits: 2
- » maximum load of each circuit: 3 A
- » ground fault detection
- » internal fault detection

TM-CB M CIRCUIT MANAGER 1x6A TM-MN.CB.KOB002



Circuit manager MCL-H

A device that controls the operation of output circuits. Depending on the operating mode, it switches on the appropriate type of voltage (AC or DC), controls the monitored CBM luminaires, performs DC current measurements and activates the modified mode.

- » number of electrical circuits: 1
- » maximum load of each circuit: 6 A
- » ground fault detection
- » internal fault detection


SET OF VTM CONTROL MODULES TM-MN.CB02M7



Batteries voltage and temperature measurement

- » number of control modules: **18 pcs.**
- » compatible with model **TM-CB M7**
- » installation: directly on the batteries

DC DISTRIBUTION KIT CB01 TM-MN.CB01MS



The set is used for expanding system with additional sub-distribution panels.

One set allows connecting three sub-distribution panels to the main cabinet.

AKU AGM 12V 34Ah TM-A5L034.UN.B1



BATTERIES | power supply for luminaires included in the system

Battery made in VRLA (AGM) technology, compatible with TM-CB model:

- » TM-CB M 7/33-112-07
- » TM-CB L2-48/34 SEL

Producer's datasheet:



VISUALSITE TM-MN.VS001



VisualSite | Emergency Lighting Visualization System

- » interface for integration and management of multiple emergency lighting systems,
- » supervising, monitoring and managing the status of the central battery equipment,
- » accessible via a web browser,
- » compatible with models TM-CB M1|M2|M3|M4|M5|M6|M7|M8|M9|M10.

*Tablet and computer are not included in the product.