

TM.ID-Master DALI-2 - 8-CHANNEL CONTROL UNIT TM-MN.DL.CEN008

Click on the selected icon to download the file:



No: 3825



No: 5665/2025
Valid until:
19.02.2030



No: 3825



No: 8210



No: 3825



No: 063-UWB-0693
Valid until:
19.02.2030



No: TM.ID-01/26



No: V1.11



| | |
|---|-------------------------------|
| Producer | TM TECHNOLOGIE |
| Category | systems |
| Application | distributed system |
| Material | plastic |
| Colour/Colour - RAL | grey , RAL7035 |
| Appliance classes | III |
| Protection degree | IP30 |
| Installation method* | DIN rail |
| Warranty (body, electronics) | 60 months |
| Net dimensions L x W x H [±2 mm] | 162 mm x 61 mm x 94 mm |

POSSIBILITIES

| | |
|--|---|
| Supported types of luminaires | 1, 4, 5, 6, 7, 8, 19 |
| Supported types of sensors | 1, 2, 3, 4 |
| Software included | TM.ID-Master DALI-2 |
| Maximum number of emergency fittings in the system | 512 pcs. |
| Maximum number of emergency fittings per circuit and channel | 64 pcs. |
| Maximum distance between control panel and luminaire | 300 m |
| I/O module using possibility | yes |
| Allowed topology | parallel connection, star connection |

DiiA Certificate

<https://www.dali-alliance.org/products/8210/tmid-master8-dali-2>

TELECOMMUNICATION CABLES

Telecommunication cables with appropriate fire classification and circuit integrity in case of fire (if applicable)

| | |
|---------------------------------------|------------------|
| Maximum length of communication cable | 1000 m |
| Maximum resistance | 75 Ω |
| Maximum conductor capacitance | 140 nF/km |

POWER CABLES

Power cables with appropriate fire classification and circuit integrity in case of fire (if applicable)

| | |
|------------------------------|----------------------------------|
| AC power cable cross section | 0,14 - 2,5 mm² |
| Communication protocol | DALI-2, TCP IP/MODBUS |


The DALI Lighting Monitoring and Control System

Control the status, configuration and management of lighting fixtures, in particular emergency lighting - monitoring the safety and other devices with the DALI version.

This controller has an ergonomic design, adapted to the intended for installation in switch-board cabinets ensuring a minimum tightness level of IP30.

TM.ID-Master DALI-2 includes a server with a web application.

TOPOLOGY

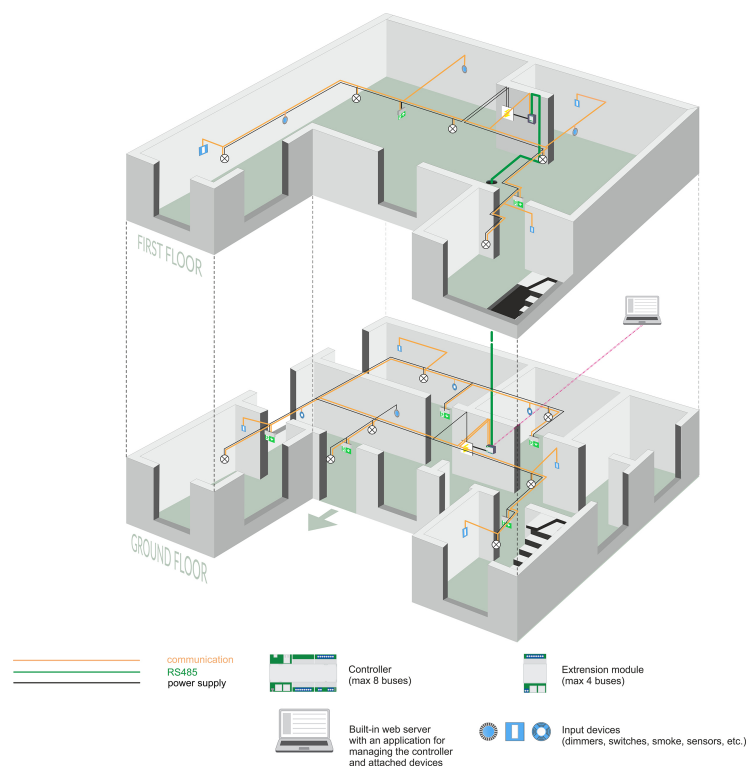

METAL HOUSING WITH GLAZING TM-MN.DL02PD

Provides IP30 protection degree



- » material: metal
- » glazing: made of PMMA

* The case can be used to hold a control unit and two DALI-2 bus power supplies or six DALI-2 bus power supplies.