# PRIMO R M1 60 NM DATA2 B
# TM-PR.M1BDN600B

Click on the selected icon to download the file:

No: 0826

No: 4601/2022
Valid until:
21.03.2027

No: 88-128842

No:
B_BK_60112_0430_2024
Valid until:
24.01.2030


No: 0826

No: DC-UAE-0206
Valid until:
21.03.2027


No: 0826

No: DIT.V1.01

No: V1.8

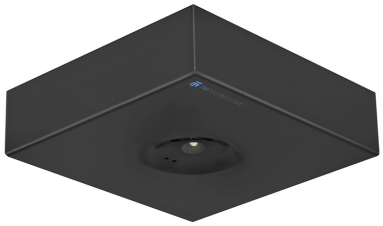

| | |
|---|---|
| Producer | **TM TECHNOLOGIE** |
| Application | **anti-panic lighting** |
| Family | **PRIMO R** |
| Colour | **black** |
| Colour - RAL | **RAL9005** |
| Version | **DATA2** |
| Operating mode | **NM** |
| Duration time | **1 h** |
| Protection degree | **IP20** |
| Impact protection degree | **IK05** |
| Appliance classes | **I** |
| Material | **steel** |
| Installation method* | **surface, ceiling** |
| Luminous flux emergency | **333 lm** |
| Light source | **LED** |
| Maximum light power | **2.5 W** |
| Active power | **1.2 W** |
| LED lifetime | **50000 h** |
| Nominal voltage AC | **210-250 V** |
| Colour temperature | **5700 K** |
| Minimum temperature | **+10 °C** |
| Maximum temperature | **+35 °C** |
| Battery | **LiFePO4/C (LN) 3.2V 1.5-1.6Ah** |
| Warranty (body, electronics, light source) | **60 months** |
| Net dimensions **L x W x H** [±2 mm] | **136 mm x 36 mm x 131 mm** |




* Some of mounting methods are possible only with additonal accessory dedicated for that product.