

PRIMO R M1 60 NM DATA2 B

TM-PR.M1BDN600B

Click on the selected icon to download the file:



No: 0825



No: 4601/2022
Valid until:
21.03.2027



No: 88-128842



No:
B_BK_60112_0430_2024
Valid until:
24.01.2030



No: 0825



No: DC-UAE-0206
Valid until:
21.03.2027




No: 0825



No: V1



No: V1.7

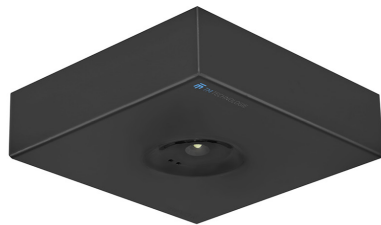

Producer	TM Technologie
Application	anti-panic lighting
Family	PRIMO R
Colour/Colour - RAL	black , RAL9005
Version	DATA2
Operating mode	NM
Duration time	1 h
Protection degree	IP20
Impact protection degree	IK05
Appliance classes	I
Material	steel
Installation method*	surface, ceiling
Luminous flux emergency	333 lm
Light source	LED
Maximum light power	2.5 W
Active power	1.2 W
Nominal voltage AC	210-250 V
LED lifetime	50000 h
Colour temperature	5700 K
Minimum temperature	+10 °C
Maximum temperature	+35 °C
Battery	LiFePO4/C (LN) 3.2V 1.5-1.6Ah
Warranty (body, electronics, light source)	60 months
Net dimensions L x W x H [±2 mm]	136 mm x 36 mm x 131 mm

