
TM TECHNOLOGIE


PRIMO TRL M1 180 NM DALI W + ADAPTER TM-TL.M1DAN80SW


Click on the selected icon to download the file:


No: 3226 | No: 3226 | | No: 1955 | No: 3226 | | No: DIT.V1.01 | No: V1.3

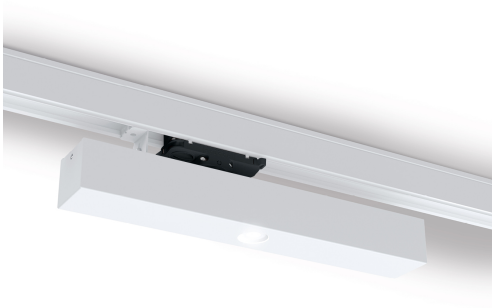

Producer	**TM TECHNOLOGIE**
Category	**emergency luminaires**
Family	**PRIMO TRL**
Colour	**white**
Colour - RAL	**RAL9003**
Version	**DALI**
Operating mode	**NM**
Duration time	**3 h**
Protection degree	**IP20**
Impact protection degree	**IK08**
Appliance classes	**I**
Material	**steel**
Colour structure	**painted**
Installation method*	**ceiling, surface**
Luminous flux emergency	**326 lm**
Nominal voltage AC	**210-250 V**
Nominal voltage DC	**- V**
Light source	**LED**
Maximum light power	**2.5 W**
Active power	**3.6 W**
LED lifetime	**50000 h**
Colour temperature	**5700 K**
Minimum temperature	**+ 0 °C**
Maximum temperature	**+ 35 °C**
Battery	**LiFePO4/C (LN) 6.4V 1.5-1.6Ah**
DALI type	**D**
Warranty (body, electronics, light source)	**60 months**
Net dimensions **L x W x H** [±2 mm]	**350 mm x 50 mm x 89 mm**







h	a	b	c	d
2,5	3,5	9	3,5	9
3	4,5	10	4,5	10
4	5	12,5	5	12,5
5	5,5	14,5	5,5	14,5
6	5	16,5	5	16,5
7	4,5	18	4,5	18
8	4,5	19	4,5	19
9	4	20	4	20
10	4	20	4	20

Emin ≥ 0,5 lx

* Some of mounting methods are possible only with additonal accessory dedicated for that product.