

TM TECHNOLOGIE
emergency & evacuation lighting



IP 20
IP 44



850 °C





210 ÷ 250 V AC
50 / 60 Hz
186 ÷ 254 V DC

TM.BOA IN




2

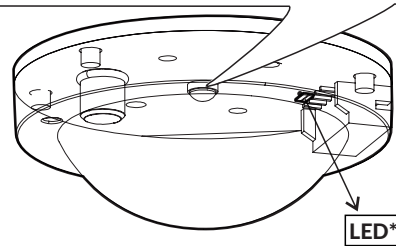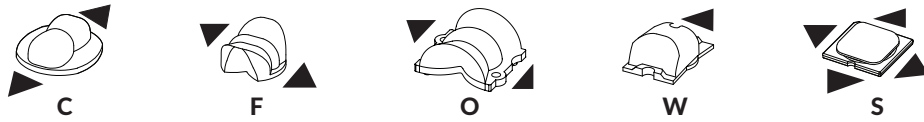

3


3.1A ➔ 1.2A ➔ 3.2A ➔ 3.3 ➔ 3.4c/3.4.d/3.4e/3.4f/3.4g ➔ 3.5f
3.1B ➔ 3.3

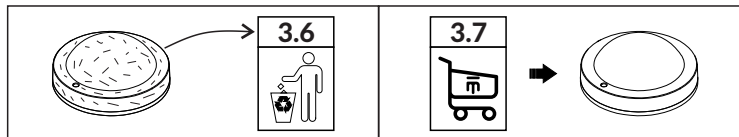

3.8A ➔ 1.4 ➔ 1.6A ➔ 1.7A ➔ 1.8c/1.8.d/1.8e/1.8f ➔ 1.9f/1.10g
3.8B ➔ 1.4

4


*ST / AT / DT / D2 / D3 / D2R / D3R / DA / DL

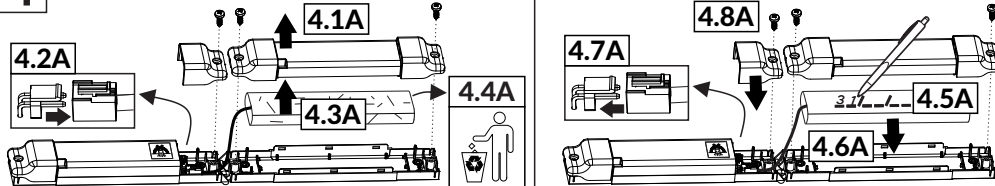


BOA IN	M	NM	CB
t _a [°C]	105	80	105




BOA IN	M1
t _a [°C]	95




BOA IN	CBA
t _a [°C]	100



BOA IN	1LED
t _a [°C]	70



BOA IN	CBA	CB+, CBM
t _a [°C]	80	95




1


ST / AT / DT / D2 / D3 / D2R / D3R / DA / DL







A ST / AT / DT / D2 / D3 / D2R / D3R / DA / DL



B CB / CB+ / CBA / CBM



! ±1 [mm]



CBA / CBM / D2 / D3 / D2R / D3R / DA / DL

