

TM TECHNOLOGIE
emergency & evacuation lighting

TM.INDUST
T 1D / T 3D / V 1D / V 3D



IP 66
IP 69

IK 08

LED




220 ÷ 240 V AC
50 / 60 Hz
186 ÷ 254 V DC
0 Hz




d=30 m


d=60 m


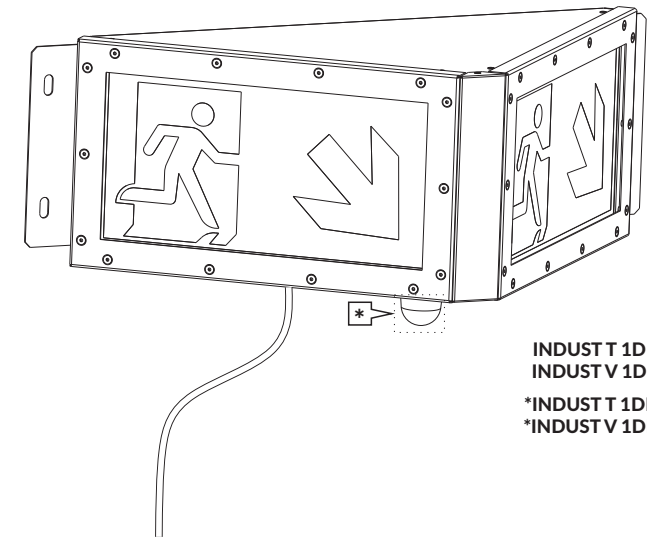


INDUST T 1D
INDUST V 1D
*INDUST T 1DF
*INDUST V 1DF

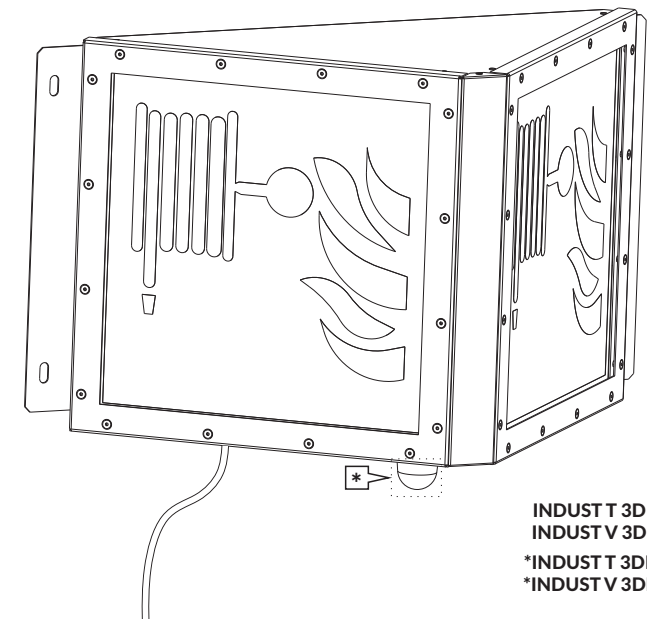

INDUST T 3D
INDUST V 3D
*INDUST T 3DF
*INDUST V 3DF

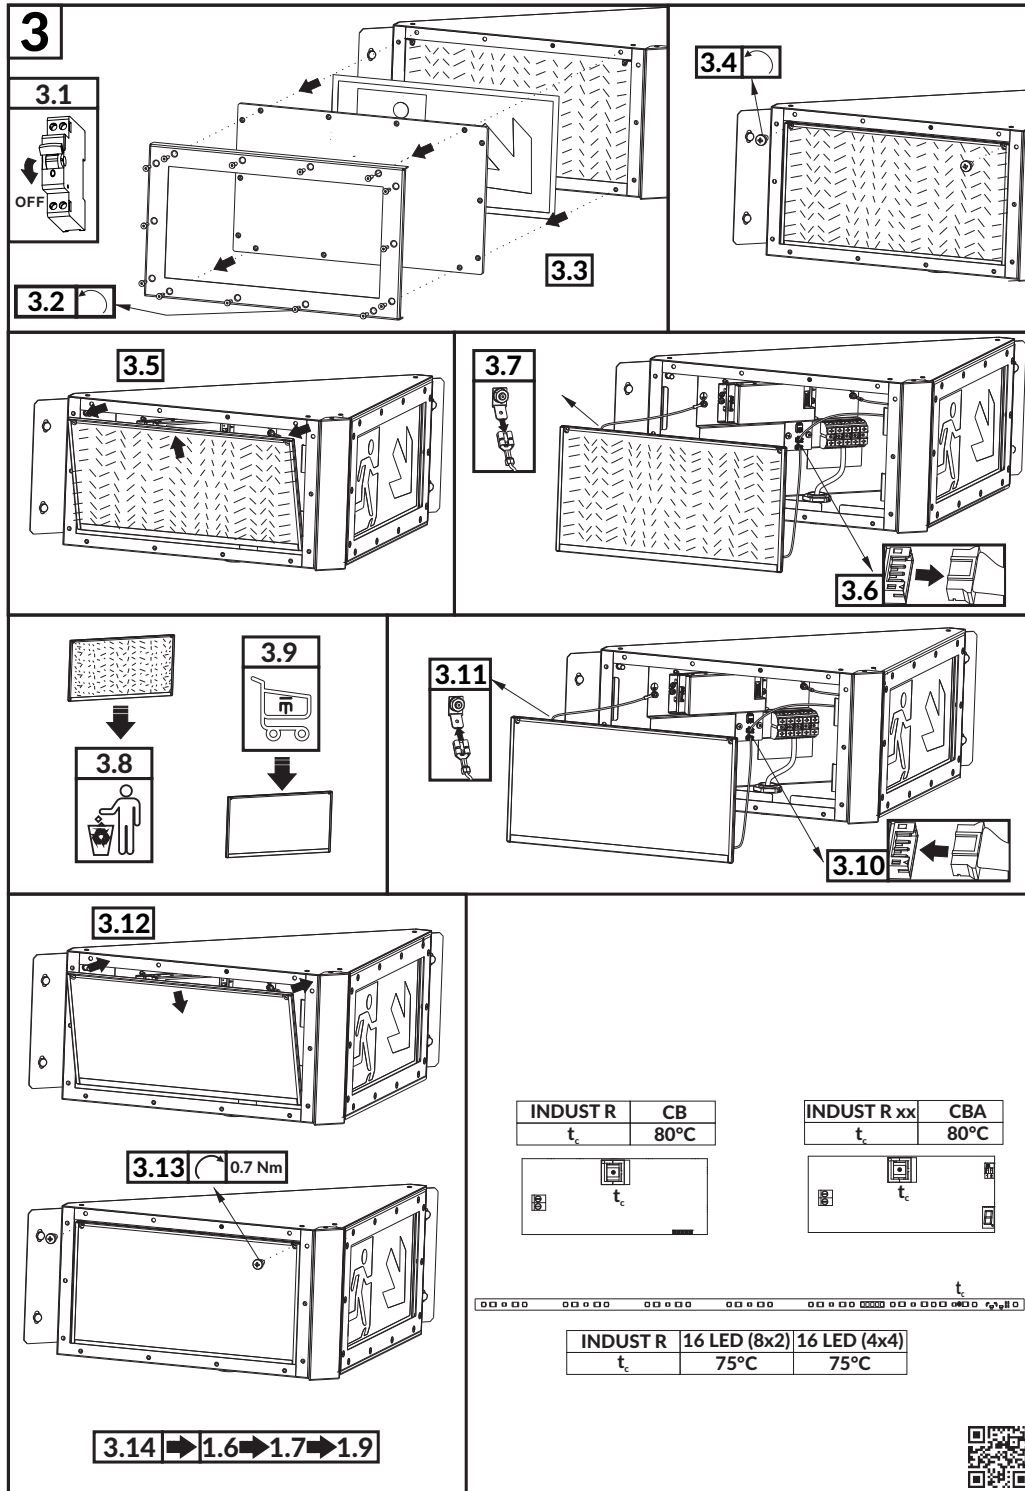


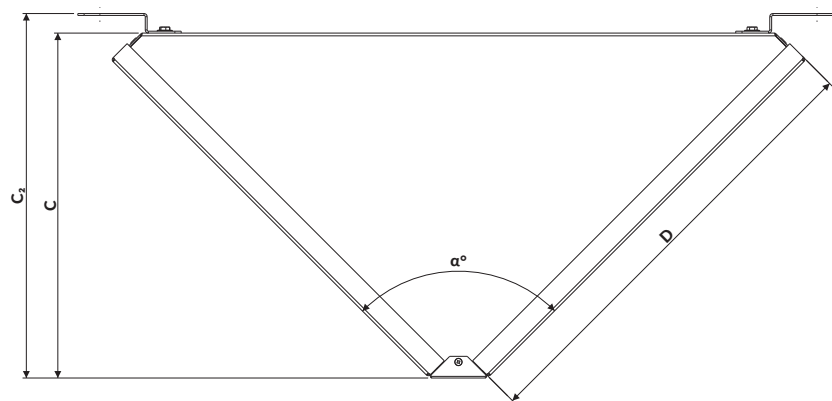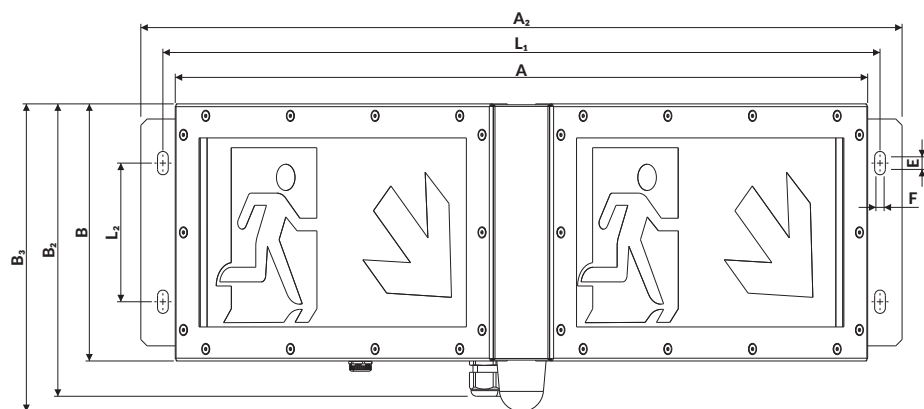


! ±1 [mm]

INDUST	A	B	C	D	E	F	A ₂	B ₂	C ₂	B ₃	L ₁	L ₂	α
T 1D		204					232	-	-	-	-	110	
T 1DF	549		274				604	289	244	569	110	90°	
T 3D		354					382		394		260		
T 3DF				356	10	8.5							
V 1D		204					232	-	-	-	-	110	
V 1DF	703		158				760	173	244	725	110	140°	
V 3D		354					382		394		260		
V 3DF													


1

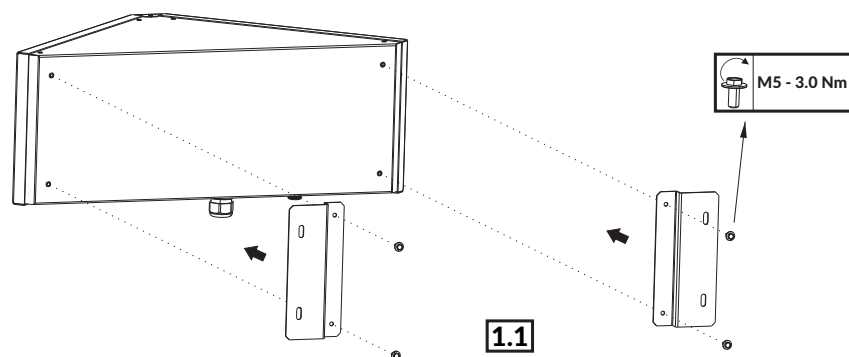

1.1

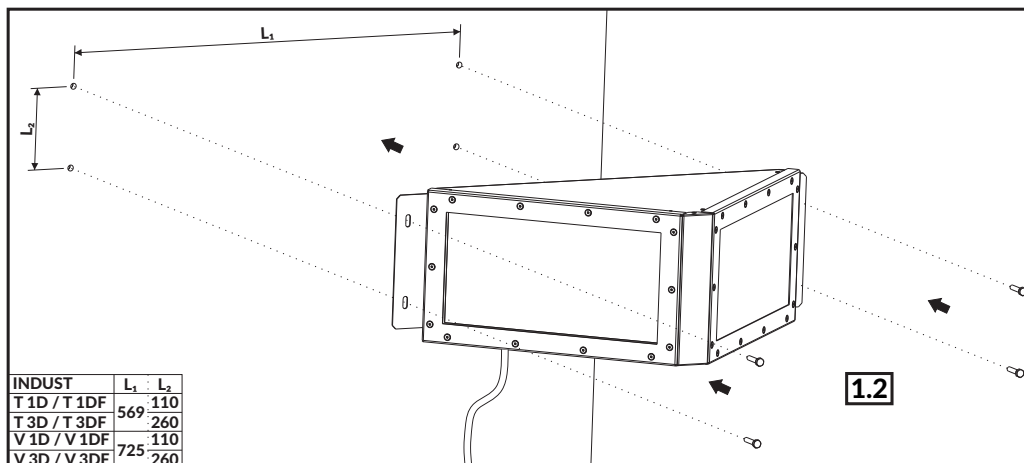


1.2

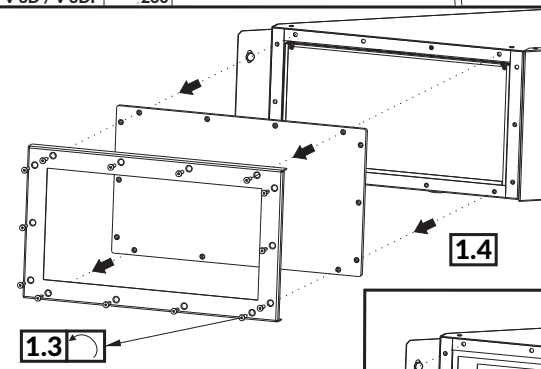


1.3

1.4

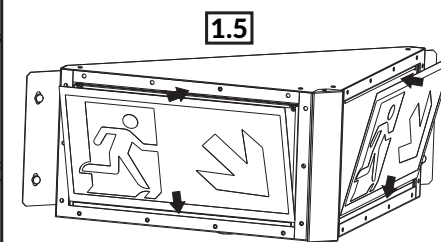


1.5

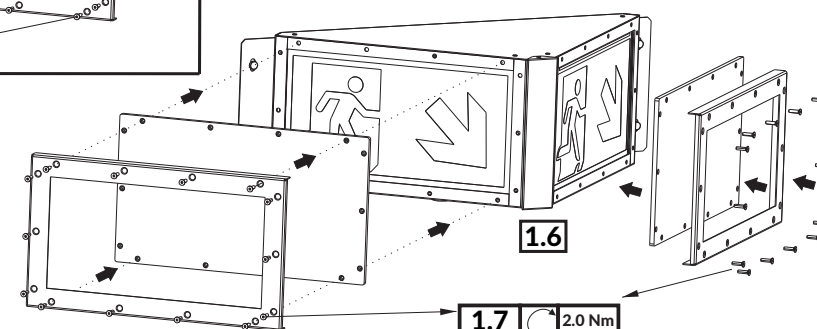

1.6

1.7 2.0 Nm

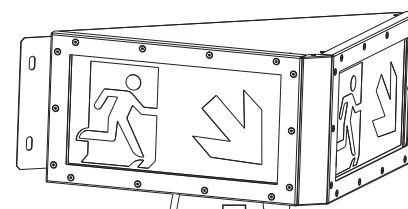

INDUST

L - brown

N - blue

PE - yellow-green

DA - black

DA - grey

*INDUST

L - (1)

N - (2)

PE - yellow-green


DA - (3)

DA - (4)

*L - (5)

*N - (6)

1.8

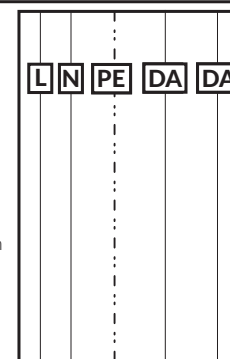

1.9